
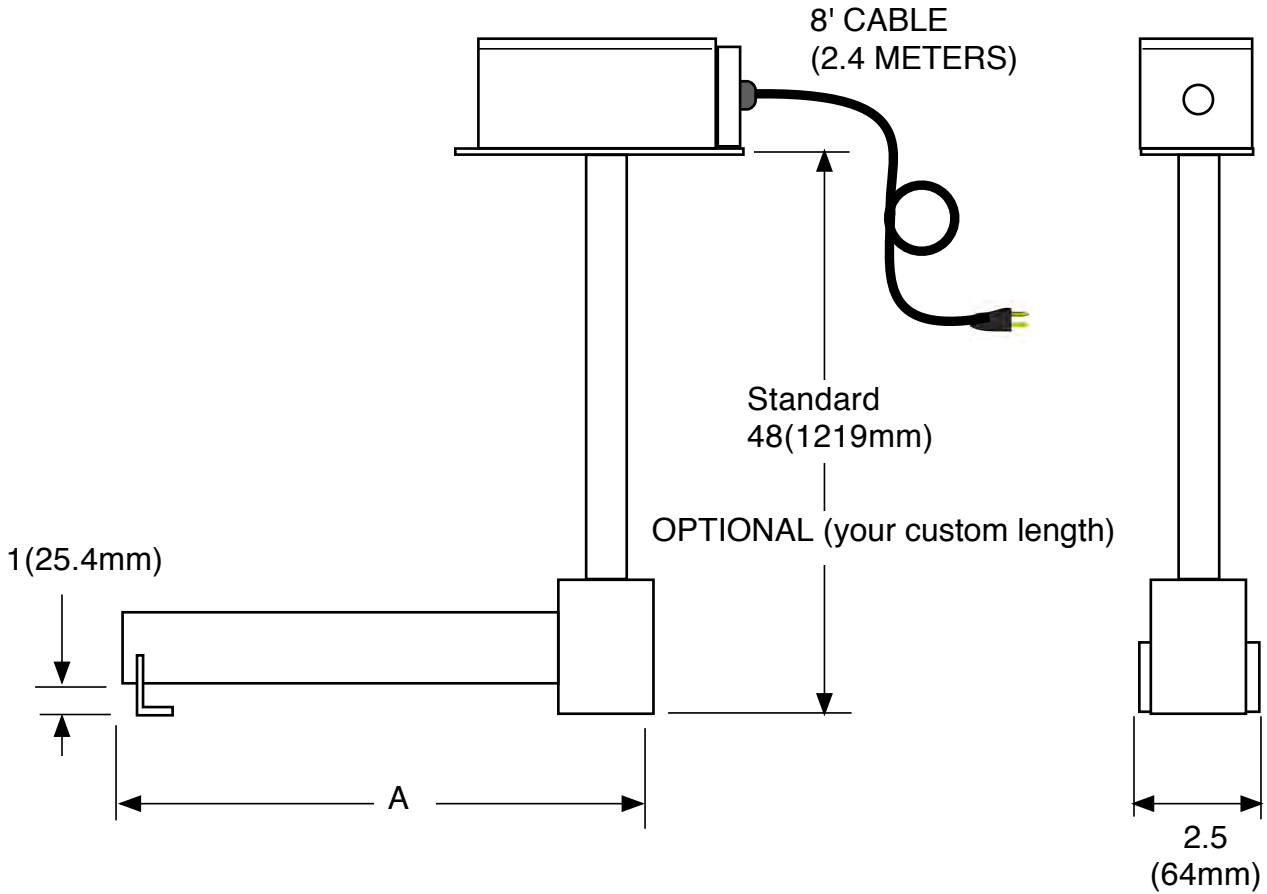


# DIGITAL TOTE L-Style Heaters

Digital control  
Optional



WATTS	A
	in / mm
500	14 (356)
1000	14 (356)
1800	19 (483)

# DIGITAL TOTE L-Style Heaters



Digital Control



MODEL	MODEL	WATTS	VOLTS
MILD STEEL	304 SS		
PTHDWL.5-1	PTHDWSL.5-1	500	120V
PTHDWL.5-2	PTHDWSL.5-2		240V
PTHDWL1-1	PTHDWSL1-1	1000	120V
PTHDWL1-2	PTHDWSL1-2		240V
PTHDWL1.8-1	PTHDWSL1.8-1	1800	120V
PTHDWL1.8-2	PTHDWSL1.8-2		240V

Designed for totes

Can be used in oils , and with some solvents

Digital control with dual readout

With chemical based liquids check compatabilty.

PTC element design to reduce low level burnout

Energy efficient PTC technology

Dual digital control readout 0-400°C, 0-400°F range  $\pm 0.5\%$ FS