


Tote L-Style Heaters

Digital control
Optional

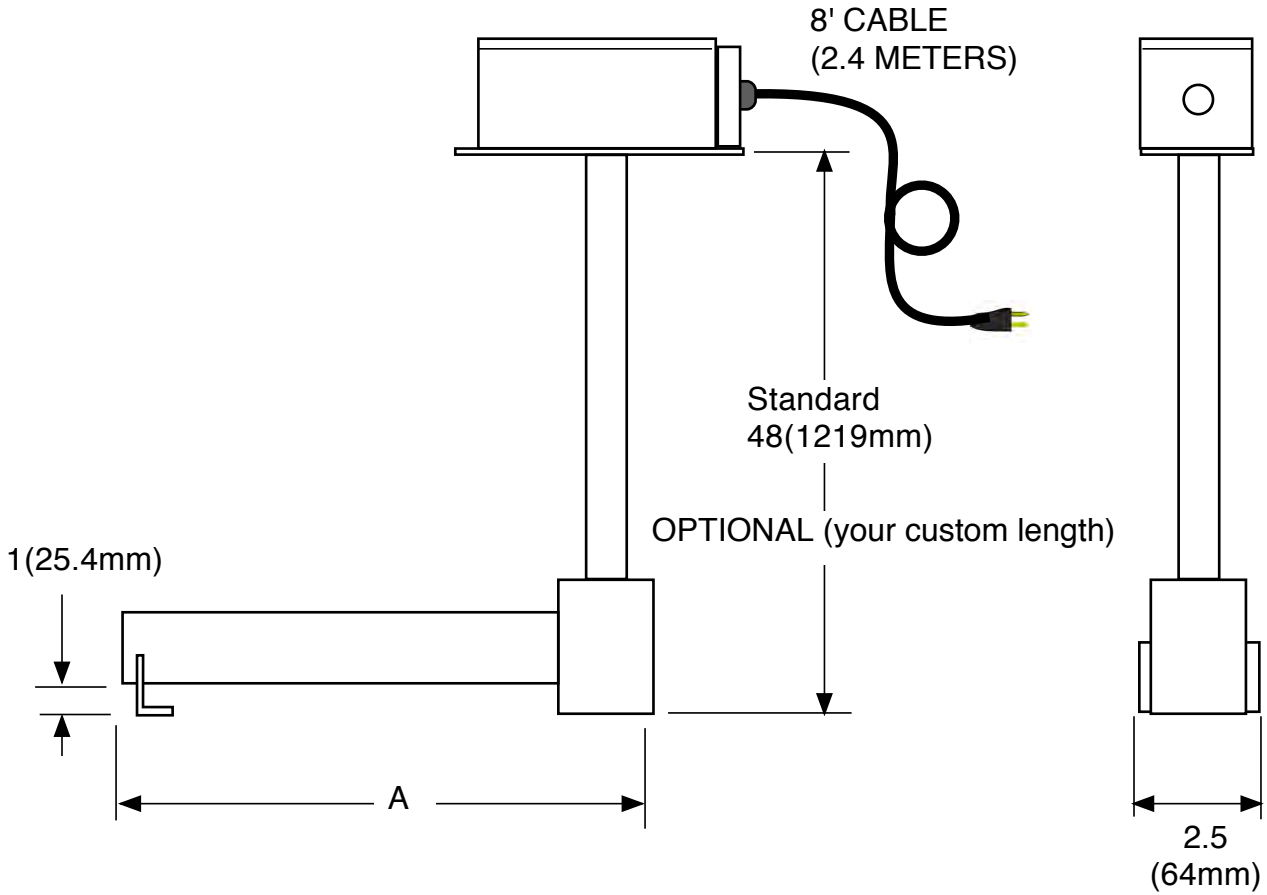

WATTS	A
	in / mm
500	14 (356)
1000	14 (356)
1800	19 (483)

TOTE L-Style Heaters



SNAP ACTION
THERMOSTAT
PRESET
TEMPERATURES

MODEL	MODEL	WATTS	VOLTS	ON TEMP	OFF TEMP
MILD STEEL				°C / °F	°C / °F
PTHWL.5-18-1	PTHWSL.5-18-1	500	120V	3 / 37	18 / 65
PTHWL.5-18-2	PTHWSL.5-18-2		240V		
PTHWL1-18-1	PTHWSL1-18-1	1000	120V		
PTHWL1-18-2	PTHWSL1-18-2		240V		
PTHWL1.8-18-1	PTHWSL1.8-18-1	1800	120V		
PTHWL1.8-18-2	PTHWSL1.8-18-2		240		

MODEL	MODEL	WATTS	VOLTS	ON TEMP	OFF TEMP
MILD STEEL				°C / °F	°C / °F
PTHWL.5-27-1	PTHWSL.5-27-1	500	120V	16 / 60	27 / 81
PTHWL.5-27-2	PTHWSL.5-27-2		240V		
PTHWL1-27-1	PTHWSL1-27-1	1000	120V		
PTHWL1-27-2	PTHWSL1-27-2		240V		
PTHWL1.8-27-1	PTHWSL1.8-27-1	1800	120V		
PTHWL1.8-27-2	PTHWSL1.8-27-2		240		

MODEL	MODEL	WATTS	VOLTS	ON TEMP	OFF TEMP
MILD STEEL				°C / °F	°C / °F
PTHWL.5-40-1	PTHWSL.5-40-1	500	120V	30 / 86	40 / 104
PTHWL.5-40-2	PTHWSL.5-40-2		240V		
PTHWL1-40-1	PTHWSL1-40-1	1000	120V		
PTHWL1-40-2	PTHWSL1-40-2		240V		
PTHWL1.8-40-1	PTHWSL1.8-40-1	1800	120V		
PTHWL1.8-40-2	PTHWSL1.8-40-2		240		

Designed for totes
Can be used in oils , and with some solvents
Digital control with dual readout
With chemical based liquids check compatabilty.